

# Galileosky 10

Powerful range of GPS tracking devices designed to enhance your solutions

## Oil and gas

Fixed and mobile facilities with increased safety requirements

## Transportation and special vehicles

Extremely hazardous climatic conditions and remote areas

## Ships

Areas of open seas and oceans without GSM communication

## Rally Rides

Crew location tracking

# Galileosky 10

## Remote configuration: freedom to manage your devices from anywhere in the world

- ✓ Ability to send commands to the terminal
- ✓ Remote configuration via GSM

## Exceptional Reliability


- ✓ Enhanced durability and performance of interfaces
- ✓ Built-in eMMC has eliminated the risk of malfunctions associated with external storage solutions

## 100% Control

- ✓ Accurate positioning
- ✓ Can read over 13 000 parameters from the CAN-bus using the J1939 protocol

## Flexibility: settings without constraints

- ✓ Driver notifications: customize a variety of notifications by using any of the parameters
- ✓ Select only the necessary data to be sent
- ✓ Create your own algorithms with Easy Logic\*

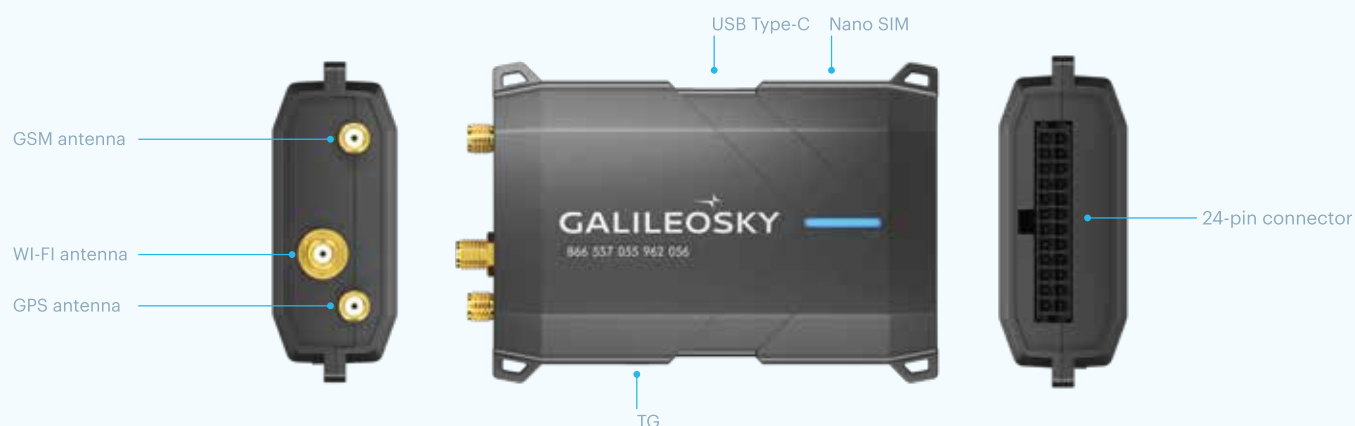

## Specifications

|                     | Galileosky 10                                           | Galileosky 10 C         | Galileosky Plus                                         |
|---------------------|---------------------------------------------------------|-------------------------|---------------------------------------------------------|
| Antennas            | GSM, GPS/GLONASS                                        | GSM, GPS/GLONASS        | GSM, GPS/GLONASS                                        |
| Antenna type        | External/Internal                                       | External/Internal       | External/Internal                                       |
| Interfaces          | RS 485, RS 232, 2- CAN, 1-Wire                          | RS 485, 1 - CAN, 1-Wire | RS 485, RS 232, 2-CAN, 1-Wire                           |
| Inputs/outputs      | 6 inputs 4 outputs                                      | 10 inputs 4 outputs     | 8 inputs 4 outputs                                      |
| Accelerometer       | Inbuilt                                                 | Inbuilt                 | Inbuilt                                                 |
| Autoinformers       | Inbuilt                                                 | -                       | Inbuilt                                                 |
| Archive size        | 170 000 points (flash),<br>up to 2,5 mln per 1Gb (eMMC) | 170 000 points (flash)  | 170 000 points (flash),<br>up to 2,5 mln per 1Gb (eMMC) |
| Voice communication | +                                                       | -                       | +                                                       |
| Temperature mode    | -40...+85°C                                             | -40...+85°C             | -40...+85°C                                             |
| Dimensions          | 91x66.5x25.5                                            | 91x66.5x25.5            | 91x66.5x25.5                                            |
| Built-in Battery    | Li-Ion 600 mAh                                          | Li-Ion 600 mAh          | Li-Ion 600 mAh                                          |
| BLE                 | 5.0                                                     | 5.0                     | 5.0                                                     |
| Cellular Network    | 2G/LTE Cat-1/LTE Cat-M1                                 | 2G/LTE Cat-1/LTE Cat-M1 | 2G/LTE Cat-1/LTE Cat-M1                                 |

## Technologies



Easy Logic\*



CAN Scanner



Eco Driving



Discover the power of Galileosky 10 devices and unlock a new level of efficiency and control!